


W-Cable for Super Averaging Beam

Mini-Line®

The W-cable is used for connection of the Mini-Line® Grade and Slope Control System with the SUPER Averaging Beam. The primary use is to connect a HS301 Handset, a slope sensor and the SUPER Averaging Beam to an asphalt paver.

The cable is designed for the environment on pavers and milling machines. It is made of PUR jacketed coiled cables giving flexibility and protection against chemicals and abrasion. The connectors are fully encapsulated.

The cable length specified is the maximum recommended lengths used.

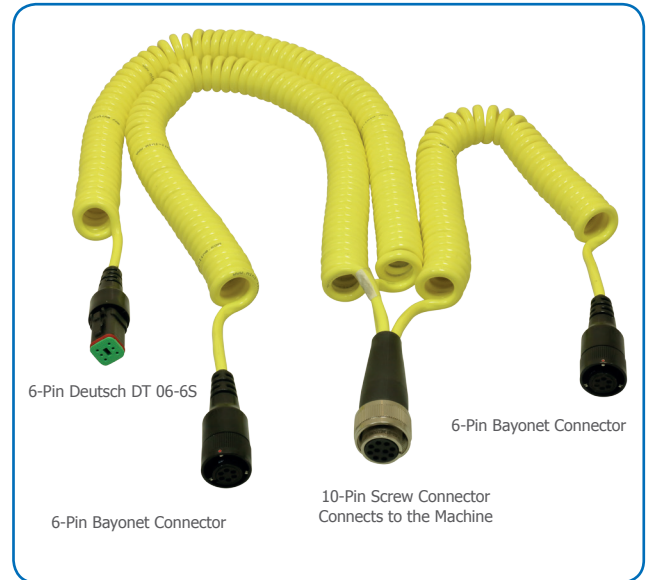

W-Cable Specifications

Part Number	S-51605
Application	Connecting Mini-Line® Grade & Slope Control System with SUPER Averaging Beam to the machine
Power Supply	12/24 Volt Systems (10-30 VDC)
Material	PUR Jacketed Cables
Dimensions, Cable Lengths	1x2.2m + 2x4m / 1x7.2ft + 2x13.1ft
Weight	1.6kg / 3.5lbs
Storage Temperature	-40°C to 85°C / -40°F to 185°F
Operating Temperature	-10°C to 70°C / 14°F to 158°F
Connector	1 x 10-Pin Screw, Female 1 x 6-Pin Deutsch DT 06-6S 2 x 6-Pin Bayonet, Female